



# UK Wood Floors

Direct From The Mill To You



Retail Brochure 2026  
Issue 1

As featured on  
**GRAND  
DESIGNS**



Engineered & Solid Wood Flooring  
At Manufacturer's Prices

BRITISH MADE



**UK Wood Floors specialise in the manufacture of engineered and solid wood flooring for both residential and commercial use direct to trade & public and have over 45 years of installation experience and technical expertise.**

Whether supply only or providing a full fitting service, we work closely with our customers to ensure a smooth installation process and unrivalled quality of flooring installation, sanding and finishing. We produce our own flooring and pride ourselves on the ability to ensure quality and value for money throughout the production, supply, fitting and finishing process.

With our bespoke finishing line we have full control of the production process so we can provide almost any specification that you require, be it planks or parquet.

PLEASE NOTE THAT WHILST OUR PRODUCTION IS EXACTING AT EVERY STAGE OF THE PROCESS, NATURE DOES NOT CONFORM TO REQUIREMENTS. EVERY WOOD FLOOR IS UNIQUE, BEAUTIFUL AND ONE OF A KIND. THE COLOUR, GRAIN, KNOTS AND OTHER MARKINGS WILL VARY FROM SAMPLES AND FROM BATCH TO BATCH. WE WORK WITH NATURE, WE DO NOT EXPECT IT TO WORK FOR US.



= Suitable for underfloor heating



## TRADE LINE 14MM ENGINEERED OAK PLANKS



See pages 7 and 8 for available finishes

Width	Thickness	Length	Micro Bevel	T&G	Rustic m <sup>2</sup>	Prime m <sup>2</sup>
190mm	14mm	1900mm	Sides Only	4 Sides	£52.50	£74.50

Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

# FACTORY SPECIAL 15MM ENGINEERED OAK PLANKS - RUSTIC GRADE



Oak top layer

Multi-ply



4mm  
11mm

For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	15mm Pre-finished Price m <sup>2</sup>	Additional Treatments m <sup>2</sup>
150mm			£55.50	
190mm			£58.50	
220mm			£62.60	
260mm			£69.50	
	Sides Only	4 Sides		Graining + £10.00 Brushing + £2.00

## 20MM ENGINEERED OAK PLANKS - RUSTIC GRADE



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	20mm Pre-finished Price m <sup>2</sup>	Additional Treatments m <sup>2</sup>
190mm			£68.50	Graining + £10.00
220mm			£74.50	Brushing + £2.00
260mm	Sides Only	4 Sides	£79.50	


Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

## 15MM ENGINEERED OAK PLANKS - PRIME A/B



15mm planks

Oak top layer



Multi-ply



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	15mm Pre-finished m <sup>2</sup>	Additional Treatments m <sup>2</sup>
150mm			£91.50	
190mm			£95.50	
220mm	Yes	4 Sides	£98.50	Graining + £10.00 Brushing + £2.00

## 20MM ENGINEERED OAK PLANKS - PRIME A/B



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	20mm Pre-finished m <sup>2</sup>	Additional Treatments m <sup>2</sup>
190mm 220mm	Yes	4 Sides	£106.50 £110.50	Graining + £10.00 Brushing + £2.00

Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

## BESPOKE FINISHES AVAILABLE ON OUR FLOORING



Clear



Burnt Oak ML



Antique Oak 184 TX



Chestnut SA



Chocolate 180 TX



Natural Timber ML



Nordic White ML



Onyx ML



Pebble Grey 1690 TX



Raw Oak ML



Silver Grey ML



Slate TX

PLEASE NOTE THAT WOOD IS A NATURAL PRODUCT WITH VARIATIONS IN GRAIN, SAP CONTENT, COLOUR TONE AND TEXTURE. THESE PHOTOGRAPHS & SAMPLES SHOULD ONLY BE TAKEN AS A GUIDE TO THE FINAL PRODUCT. ALL STAINS ARE FINISHED WITH CLEAR HARDWAX OIL. REPEAT ORDERS PRODUCED AT DIFFERENT TIMES CAN VARY SUBSTANTIALLY.

## BESPOKE FINISHES AVAILABLE ON OUR FLOORING



English ML HWO



Graphite Grey ML HWO



Mocha ML



Old English Stain ML



Antique Grey SA



Dark Oak Stain FI



Walnut Stain FI



Jacobean Stain ML



Teak ML



Rosewood Stain ML



Ebony 190 TX



Black ML

PLEASE NOTE THAT WOOD IS A NATURAL PRODUCT WITH VARIATIONS IN GRAIN, SAP CONTENT, COLOUR TONE AND TEXTURE. THESE PHOTOGRAPHS & SAMPLES SHOULD ONLY BE TAKEN AS A GUIDE TO THE FINAL PRODUCT. ALL STAINS ARE FINISHED WITH CLEAR HARDWAX OIL. REPEAT ORDERS PRODUCED AT DIFFERENT TIMES CAN VARY SUBSTANTIALLY.

## ANTIQUE ENGINEERED OAK PLANKS

Our Antique planks are a distinctive collection of hand-finished boards, crafted to deliver a bespoke, authentically aged appearance.



Further details and fitting guidelines available on request. Other finishes available, See pages 7/8

Width	Micro Bevel	T&G	15mm Price	20mm Price
150mm			£79.50	n/a
190mm			£84.50	£102.50
220mm	Distressed	4 Sides	£89.50	£107.50

## BANDSAWN ENGINEERED OAK PLANKS

A distinctive range of cross-sawn oak planks providing a striking textured look and feel, finished with your choice from our wide range of bespoke colours.



Further details and fitting guidelines available on request. Other finishes available, See pages 7/8

Width	Micro Bevel	T&G	15mm Price	20mm Price
150mm			£67.50	n/a
190mm			£71.50	£88.50
220mm	Yes	4 Sides	£76.50	£93.50

## ASH 15MM ENGINEERED SELECT GRADE PREFINISHED PLANKS



Oak top layer



4mm  
11mm

*Our Ash flooring is a strong, versatile hardwood with light tones and unique grain patterns, perfect for any interior style.*



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	Pre-finished Stained or Hardwax Oiled m <sup>2</sup>
190mm	Yes	4 Sides	£77.50
220mm			£82.50

Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

## SOLID OAK 20MM PLANKS - RUSTIC GRADE



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Thickness	Micro Bevel	T&G	Rustic	Additional Treatments m <sup>2</sup>
120mm				£74.50	
140mm				£78.50	
160mm				£82.50	
180mm				£86.50	
	20mm	No	4 Sides		Graining + £10.00 Brushing + £2.00

## SOLID OAK 20MM PLANKS - PRIME GRADE



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Thickness	Micro Bevel	T&G	Prime	Additional Treatments m <sup>2</sup>
120mm				£106.50	
140mm				£110.50	
160mm				£114.50	
180mm				£118.50	
	20mm	No	4 Sides		Graining + £10.00 Brushing + £2.00

## SOLID OAK 22MM BLOCKS - RUSTIC AND PRIME GRADE



Blocks come unfinished and require sanding and application of oil after installation. Further details and fitting guidelines available on request. T&G 4 sides. Other sizes available.

Type	Thickness	Width	Length	Unfinished Price	
				Rustic	Prime
Solid	22mm	70mm	230mm	£41.50	£48.50
			280mm	£43.50	£50.50
			350mm	£48.50	£56.50

Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

## 10MM HERRINGBONE BLOCKS

Rustic-grade engineered oak herringbone flooring — UV lacquered for lasting protection and offered at a price that's hard to beat! Machined to 10mm thick, with each block measuring 90mm x 450mm and featuring a 3mm oak wear layer.

Ready to lay and available in seven stylish finishes, this floor is the perfect choice for rental properties or budget-conscious projects. Combining excellent value with the long-lasting quality of oak, it's a floor designed to be enjoyed for years to come.



Mystic Smoked Grey



Invisible Essence



Grande Natural



Harvest Golden



Twilight Timber



Whiskey Oak



Galaxy Black



Type	Thickness	Width	Length	Micro Bevel	T&G	Price
Engineered	10mm	90mm	450mm	Yes	4 Sides	£38.50

## 14MM HERRINGBONE BLOCKS

Our herringbone flooring is a quality rustic grade engineered Oak, at a great price! We produce this in bulk and machine it to 14mm thick, 90mm x 450mm long with a 3mm Oak wear layer.

Available in a choice of finishes, ready to lay. It offers fantastic value for money, whilst still being a durable Oak floor to be enjoyed for years to come.



Further details and fitting guidelines available on request. Other finishes available, See pages 7/8.  
Also available in Antique & Bandsawn grades.

Type	Thickness	Width	Length	Grade	Micro Bevel	T&G	Price
Engineered	14mm	90mm 90mm 125mm 125mm	450mm 450mm 600mm 600mm	Rustic Prime Rustic Prime	Yes	4 Sides	£54.50 £68.50 £60.50 £69.50

Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

# ANTIQUE OAK ENGINEERED HERRINGBONE BLOCKS

Our Antique herringbone blocks are a unique range, hand-finished with a bespoke aged appearance with your choice from our wide range of bespoke colours.



Further details and fitting guidelines available on request. Other finishes available, See pages 7/8

Type	Thickness	Width	Length	Micro Bevel	T&G	Price
Engineered	14mm	90mm 125mm	450mm 600mm	Distressed	4 Sides	£73.50 £81.50

# BANDSAWN OAK ENGINEERED HERRINGBONE BLOCKS


A distinctive range of cross-sawn oak blocks providing a striking textured look and feel, finished with your choice from our wide range of bespoke colours.



Further details and fitting guidelines available on request. Other finishes available, See pages 7/8

Type	Thickness	Width	Length	Micro Bevel	T&G	Price
Engineered	14mm	90mm 125mm	400mm 600mm	Yes	4 Sides	£67.50 £74.50

## INDUSTRIAL PARQUET

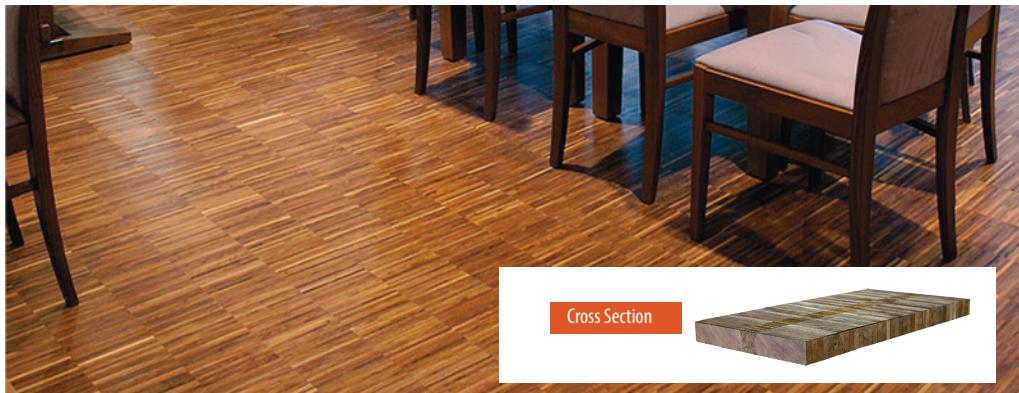

Smoked Oak

£58.50 m<sup>2</sup>



Black Cherry

£45.50 m<sup>2</sup>



Walnut

£60.50 m<sup>2</sup>



White Oak

£35.50 m<sup>2</sup>



Canadian Maple

£56.50 m<sup>2</sup>



Beech

£33.50 m<sup>2</sup>

INDUSTRIAL PARQUET is made from upright, rowed mosaic parquet pieces, popular because of its durability and modern aesthetic impact.

Thickness	Panel Size	Finish
23mm	320mm x 160mm, 40 fingers per panel	Unfinished
10mm	- Prices POA	

Other Species available - Ash, European Maple, Hard Maple, Merbau, Iroko, Doussie, Jatoba

Requires sanding & finishing after installation. Further product details, fitting guidelines & prices are available upon request.



Telephone 01252 520520 or visit [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)

# SOLID OAK MOULDINGS & TRIMS

End Section 21mm		unfinished
	840mm	£22.50
	1800mm	£44.50
	2400mm	£66.50

T-Bar 21mm		unfinished
	840mm	£22.50
	1800mm	£44.50
	2400mm	£66.50

Flush Ramp 21mm		unfinished
	840mm	£22.50
	1800mm	£44.50
	2400mm	£66.50

Ramp 21mm		unfinished
	840mm	£22.50
	1800mm	£44.50
	2400mm	£66.50

Wood - Carpet 21mm		unfinished
	840mm	£22.50
	1800mm	£44.50
	2400mm	£66.50

Stair Nosings			
Rounded	unfinished	prefinished	
	1m	£30.50	£35.50
	2m	£65.50	£70.50
Square	unfinished	prefinished	
	1m	£30.50	£35.50
	2m	£65.50	£70.50
Flush	unfinished	prefinished	
	1m	£30.50	£35.50
	2m	£65.50	£70.50

Quadrant	Primed White	Solid Oak
	15mm x 2400mm	£11.50
		£12.50

Scotia Bead	Primed White	Solid Oak
	15mm x 2400mm	£9.50
		£19.50

Solid Oak Flat Trim	
Length	2400mm
per length	£13.50
	

Radiator Pipe Covers	
Each	£4.50
	

Matwell Edging	
1m	£35.50
2m	£70.00
	

Flush Threshold	
840mm	£50.50
1500mm	£100.50
2500mm	£150.50
	

## Flexible Adhesive



- Ready To Use
- One Component System
- Permanently Elastic
- Suitable For Underfloor Heating
- Solvent & Water Free
- Coverage approx 0.8-1kg/m<sup>2</sup>

£79.50 13KG

## Fastrack DPM



- Single component moisture vapour suppressant
- For use beneath adhesives when bonding wood flooring
- Coverage approx 5m<sup>2</sup> per litre provides the necessary 0.2mm thickness

5 Litres £84.50

## Spray Mop



- Made for Wood Floors
- Quick and easy cleaning
- Dries Fast
- Durable, lightweight

£42.00

## Refill Cleaner



850ml £11.75

## Refill Pad



£9.00

## Underlay



£5.50/sqm Roll Size 10 sqm

### SLATTED UNDERLAY



- Roll size 25 sqm
- 22 dB Sound reduction
- Suitable for underfloor heating
- 3.0mm Thick

(Use with an applicator gun)

£6.50/sqm

## Hardwax Oil



- A blend of natural oils & waxes
- Exceptional durability and resistance
- For internal natural wood flooring, kitchen worktops (wood) and areas subjected to a high degree of wear
- Quick drying, natural satin/matt, water repellent, tread-fast finish
- Will not peel or flake
- See pages 7-8 for available colours

1 Litre £31.50  
approx. 12m<sup>2</sup> (2coats)

2.5 Litres £66.50  
approx. 30m<sup>2</sup> (2coats)

## Adhesive Gun & 600ml Foil



£35.00 600ml £12.75

## INFORMATION & INSTALLATION GUIDELINE

By following these guidelines you should ensure the successful installation of your wood flooring, however further consultation may be required as every installation has varying conditions.

The principal enemy of timber floors is excessive exposure to moisture or dryness. Having left our premises, we have no control over the conditions to which they are subjected. Wood is a naturally hydroscopic material and will always be prone to small movement depending on climatic conditions. If suitable care and treatment is not taken, inherent stresses in wood may be released, resulting in movement or distortion such as swelling, warping, splitting or even discolouration. No liability will be accepted when problems are moisture related.

It is very important that the flooring is not installed until site conditions are suitable. Prior to installation moisture and humidity readings should be taken from the area to be fitted. The relative humidity should be between 45% and 60%. The moisture content of the sub-floor should ideally be below 5%. In new buildings, the property should be fully enclosed to outside elements (roof, doors and windows installed). All wet trades (plumbing, plastering, painting etc) should be completed and dried out. Recommended acclimatisation period for the wood flooring is 7 days. The flooring should be stacked in piles of 10-15m<sup>2</sup> or have bearers inserted between packs of flooring to allow for air circulation at ambient room temperature. We strongly advise against storage or installation of wood flooring in buildings with recently plastered or screeded areas.

An engineered plank floor can be laid as a 'floating' floor over an appropriate underlayment and glued in t&g with PVA adhesive, or fixed by secret nailing method to a suitable plywood or similar sub-floor, or to joists or battens. On level and dry concrete it can be directly fixed to the floor using an appropriate elasticated polymer adhesive. Engineered boards may initially display a bow when unpacked however this is normal and will be removed during the staggered joint laying process.

## UNDERFLOOR HEATING

All of our engineered wood flooring is suitable for use over underfloor heating, subject to suitable site conditions, fitting method and adhesives being used. Please note the following important guidelines:

- After the underfloor heating has been commissioned the heating must run for approximately 2-3 weeks to assist the evaporation of moisture in cement-based sub-floors. Ensure that any patching or leveling of the sub-floor is complete prior to installation. The heating should still be run with other sub-floor compositions such as ply or chipboard.
- Prior to installation moisture and humidity readings should be taken from the area to be fitted (see above for recommended levels). The underfloor heating should be turned off a day beforehand to ensure readings are accurate. Once the sub-floor moisture levels are suitable for installation the heating can be turned on at low level and once installation is complete the heating should then be built up in stages to room temperature over a period of 10 days

## AFTER INSTALLATION

It is important to maintain a stable humidity level all year round in order to preserve the wood's form and appearance. Wood is a hydroscopic material and due to its natural movement characteristics, slight cupping or crowning is sometimes unavoidable. The optimal humidity range for hardwood flooring is between 45 and 60%. Temperature should be maintained at about 18-24 degrees Celsius. If underfloor heating is used a maximum sub-floor temperature of 26 degrees should be observed. Temperatures in excess of this may cause excessive movement and can lead to delamination of engineered boards and/or splits appearing in the surface of the wood. Gaps appearing between the boards indicate a drying out of the wood and insufficient degree of humidity. Temperature variations can also lead to some 'creaking' being heard from the flooring. The installation of a humidifier or air exchange system can prove indispensable in controlling humidity. Above all, don't forget that wood is a living material and that we must look after it for life. A proper care programme should always be observed. By following these simple guidelines you will maintain the natural beauty of your floor.

## GRADING & TOLERANCE SPECIFICATIONS

**PRIME (AB GRADE)** Grain & colour variation, minimal sap, small sound knots allowed, moisture content 8% +/-2%.


**RUSTIC (ABCD GRADE)** Natural grain & colour variation, contains sap, medullary rays, open knots (filled), surface splits, moisture content 8% +/-2%, grading is mixed so consistency of appearance cannot be guaranteed.

**BESPOKE FINISHES** Floors finished with a coloured oil or stain can have an uneven appearance due to sap and the grain density in timber and may vary from samples. This should be noted prior to purchase.

**TOLERANCES: WIDTHS** +/-1mm, Lengths: +/-1mm, Thickness: +/-1mm, Bevel: 0.5mm, Lengths: average lengths of boards cannot be guaranteed.

**PLEASE NOTE** whilst our production is exacting at every stage of the process, nature does not conform to requirements. Every wood floor is unique, beautiful and one of a kind. The colour, grain, knots and other markings will vary from samples and from batch to batch. We work with nature, we do not expect it to work for us.

**DELIVERY** Please note that the carriers are contracted to deliver to the entrance of the premises specified. It is the Customers responsibility to ensure that the goods can be delivered to the room of their choice. Any damage to flooring delivered or shortages in quantity should be reported to the Company within 24 hours of delivery. Please do not sign for unchecked unexamined goods. In the unlikely event of goods being damaged in transit, signing in such a way invalidates our insurance and therefore a claim will not be accepted. The Company will use reasonable endeavours to comply with agreed Delivery dates, however the Company will not be liable for any loss due to delay.

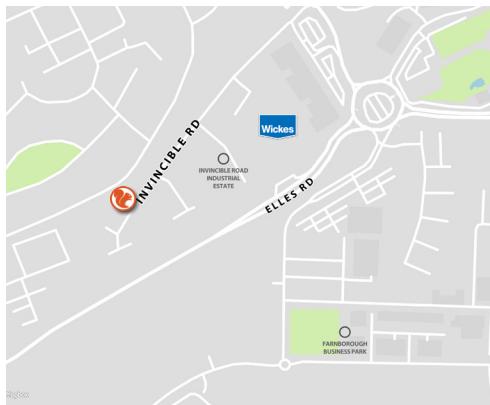

**23 Invincible Road  
Farnborough  
Hampshire GU14 7QU  
Tel: +44 (0) 1252 520520  
Email: [info@ukwoodfloors.co.uk](mailto:info@ukwoodfloors.co.uk)  
Web: [www.ukwoodfloors.co.uk](http://www.ukwoodfloors.co.uk)**

<b>Monday - Thursday</b>	<b>08:30 - 17:00</b>
<b>Friday</b>	<b>08:30 - 16:00</b>
<b>Saturday</b>	<b>Appointments Only</b>



Payments can be made by Bank Transfer or by debit/credit cards.